
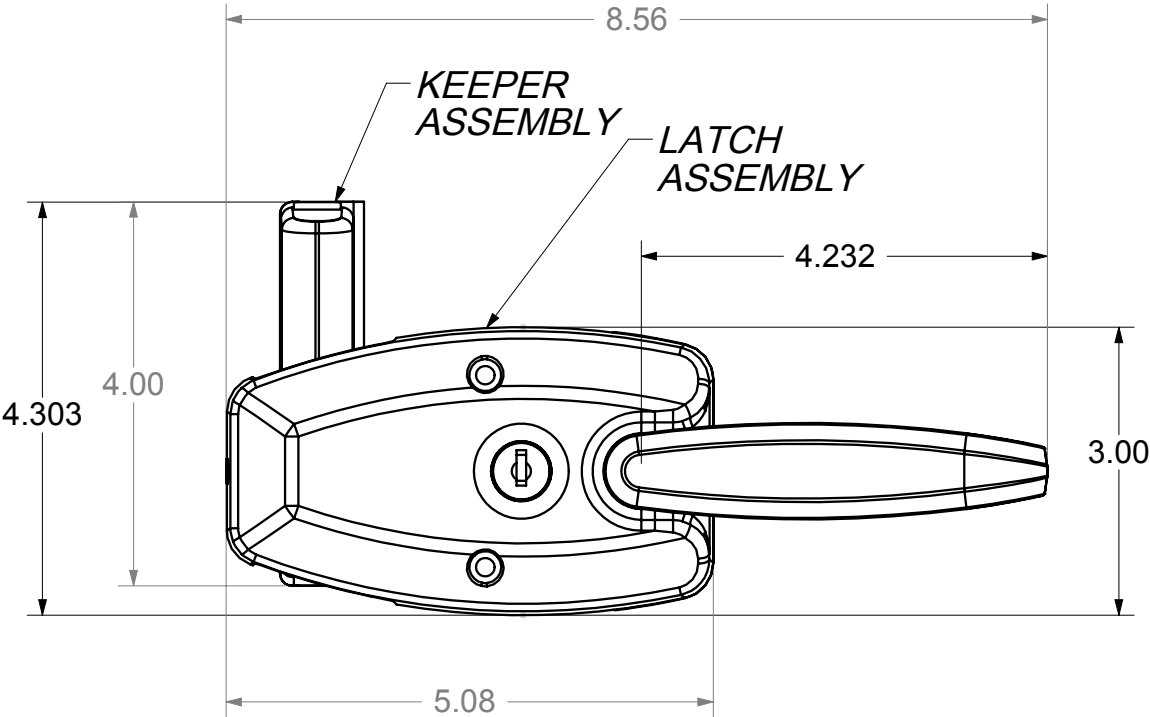
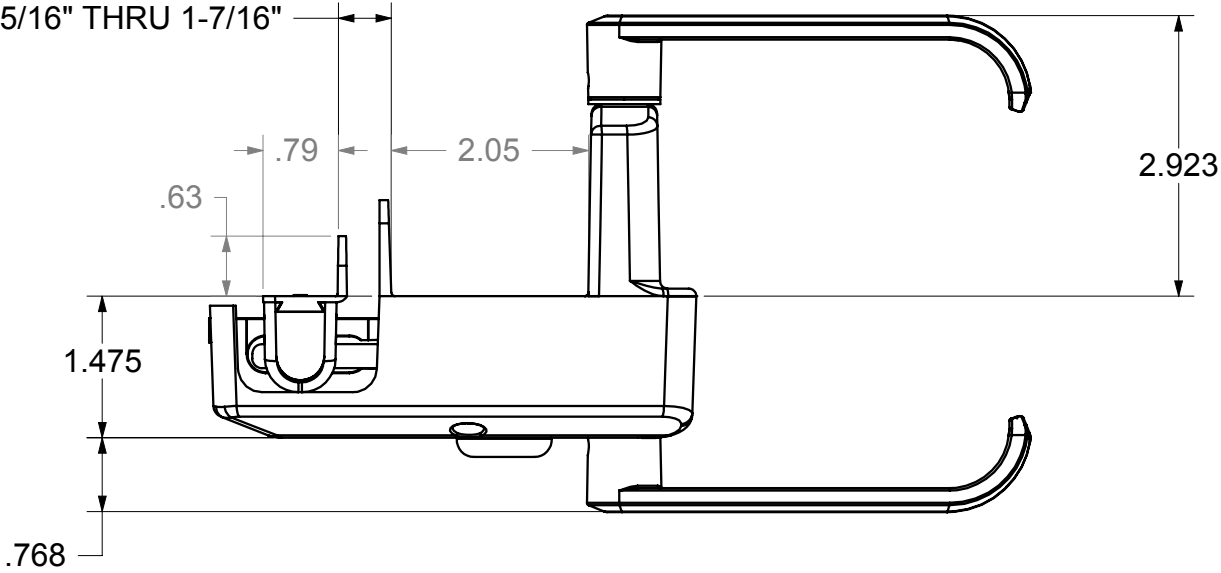
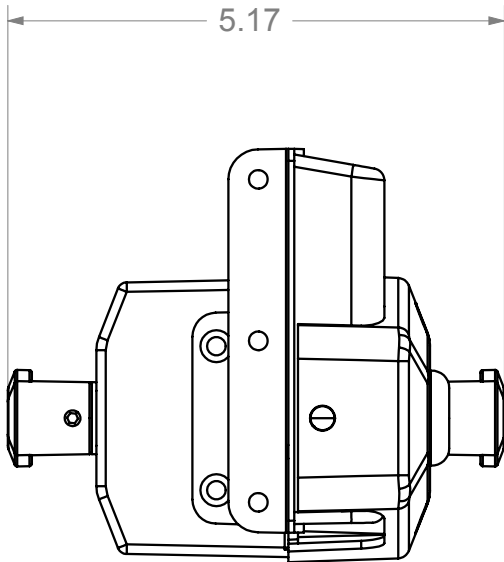
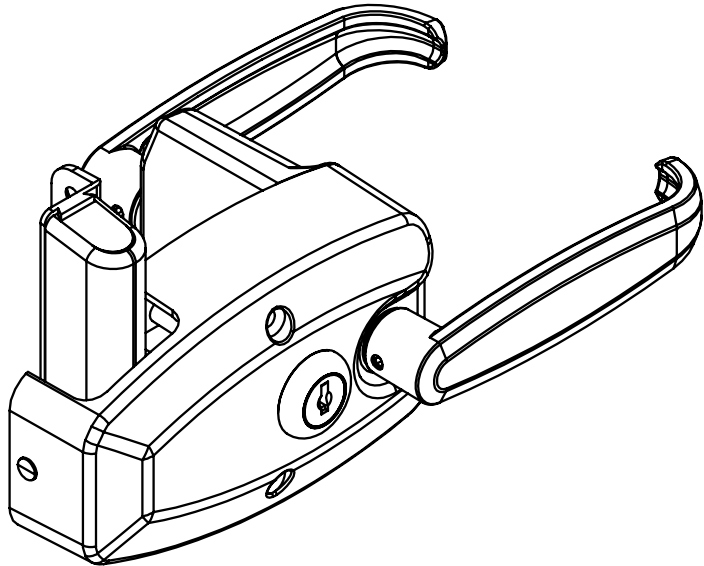
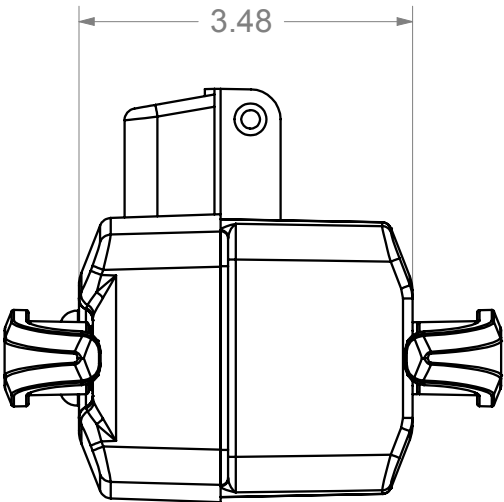


REVISIONS			
ECR/DCR	REV.	DESCRIPTION	DATE
-	-	INITIAL RELEASE	02-25-09
			APPD
			-

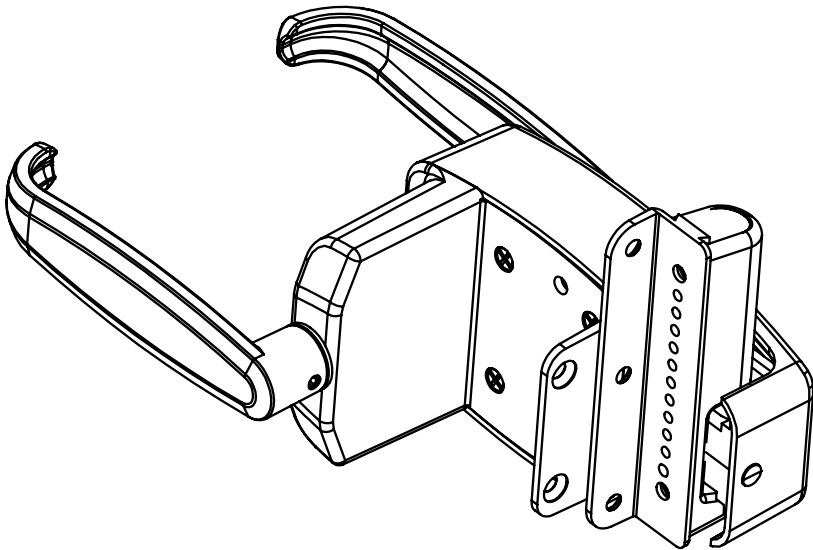

OM-L-WH (KEYED)	WHITE
OM-L-BZ (KEYED)	BRONZE
OM-L-BK (KEYED)	BLACK
OM-WH	WHITE
OM-BZ	BRONZE
OM-BK	BLACK
NWI PART NO.	COLOR

- PACKAGE CONTENTS**
- (1) KEEPER ASSEMBLY INDIVIDUALLY POLYBAGGED.
 - (1) OFFSET KEEPER BACKPLATE INDIVIDUALLY POLYBAGGED.
 - (1) LATCH ASSEMBLY INDIVIDUALLY POLYBAGGED.
 - (2) HANDLES with SET SCREWS INSTALLED INDIVIDUALLY POLYBAGGED.
 - (1) POLYBAG CONTAINING:
 - (1) SQUARE SPINDLE and
 - (1) SET SCREW WRENCH
 - (1) PACK OF STAINLESS STEEL MOUNTING SCREWS (POLYBAGGED AND LABELED "SS SCREWS FOR ALUMINUM GATES"):
 - (2) #8 x 2" lg. PHILLIPS FLAT HEAD SELF-DRILLING SCREW
 - (7) #8 x 3/4" lg. PHILLIPS FLAT HEAD SELF-DRILLING SCREW
 - (1) #6-32 x 1/4" lg. KEEPER ADJUSTMENT LOCK SCREW
 - (1) PACK OF STEEL, ZINC PLATED, MOUNTING SCREWS (POLYBAGGED AND LABELED "STEEL SCREWS FOR STEEL GATES"):
 - (2) #8 x 2" lg. PHILLIPS FLAT HEAD SELF-DRILLING SCREW
 - (7) #8 x 3/4" lg. PHILLIPS FLAT HEAD SELF-DRILLING SCREW
 - (1) #6-32 x 1/4" lg. KEEPER ADJUSTMENT LOCK SCREW
 - (1) INSTRUCTION SHEET.

DRAFT COPY

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16"$
ANGULAR: MACH $\pm 1^\circ$ BEND $\pm 1^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NATIONWIDE INDUSTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NATIONWIDE INDUSTRIES IS PROHIBITED.

ORNAMAG
ORNAMENTAL MAGNETIC LATCH

SIZE **B** DWG. NO. **CS--OM** REV. **-**

SCALE:1:2 WEIGHT: SHEET 1 OF 1